

6*18W 6IN1 APP MOBILE BATTERY POWERED LED UPLIGHT



User Manual

SAFETY INSTRUCTION

Caution

Do not attempt any repairs yourself. Doing so will void your manufactures warranty. In the unlikely event your unit may require service please contact us.

Warning

To prevent or reduce the risk of the electrical shock or fire, do not expose this unit to any moisture. Please read this manual carefully to familiarize yourself with basic operations of this unit

Safety precautions

- 1.Do not expose this unit to , wet moisture, explosive
- 2.Before plugging the power be sure local power outlets matches with the required voltage of the unit
- 3.Do not remove the cover under the circumstance in case you are not qualified to do so
- 4.Never connect the power when cover is removed
- 5.Never use this unit if it becomes damage
- 6.Never connect this unit to any if dimmer and / or power pack
- 7.If the unit will not be used for the long time , disconnect it from the power supply
- 8.Always mount this unit safe and stable and make sure the area will have proper ventilation. Take care this unit will not mounted in are close to heat sources such as lighting fixtures, amplifiers heat registers, stoves and radiators
- 9.Always contact us in case you have any doubts

General Instruction


This is a battery powered and wireless Dmx intelligent RGBAW UV color light. User can control the light by using wireless Dmx transmitter or run at master and salve mode. Fixture it has 12 static color, user can set lights at static color mode without using the Dmx controller

FEATURE & INSTRUCTION

Light source	Led
LED quantity	6pcs x 18W LED
Color	RGBWA+UV 6in1
Voltage	AC110V-250V 50-60Hz
Power consumption	108W
Housing	Die Casting Aluminium
IP Rate	IP 22
LED angle	15/25/40 degree
Display	4 digit digital LED display
Battery capacity	8800MAH
Charging Time	5 hours
Control channel	6/10 CH
Control mode	DMX512, infrared control, 2.4G, Sound mode, Master/slave, Auto run, Infrared control, iOS/Android Mobile phone App Control
Light body size	19.5*19*25.5CM
Packing size	1PC/CTN 3KG, 6pcs/CTN 19KG
N.W	3KG
G.W	3.5KG



MAIN MENU

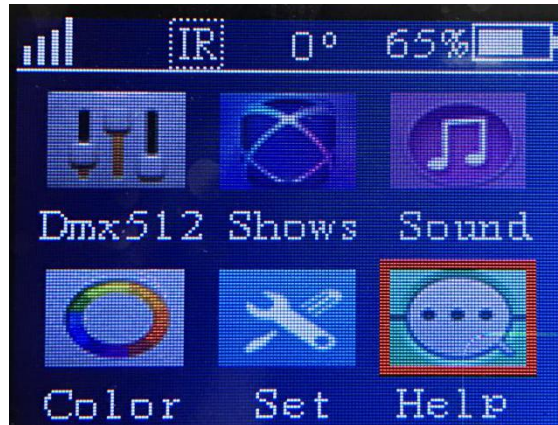

MENU



UP



DOWN



ENTER

Operation Status

Dmx512	Shows	Sound	Color	Set	Help
A001 Console and slave mode	1.Auto Color: jump change Press Enter to adjust the speed (1-99)	1.Sound mode 1: Press Enter to adjust the sensitivity (1-100)	1.Custom color: Manual dim R: 0-255 G: 0-255 B: 0-255 W: 0-255 Y: 0-255 U: 0-255	1.DMX Channel: 6 CH / 10 CH	Name: 6 Color
	2.Auto Fade: fade change Press Enter to adjust the speed (1-99)	2.Sound mode 2: Press Enter to adjust the sensitivity (1-100)		2.2.4G wireless: ON / OFF	Version: V4.5
	3.Auto sudden: suddenly change Press Enter to adjust the speed (1-99)	3.Sound mode 3: Press Enter to adjust the sensitivity (1-100)		3.Infrared: ON / OFF	DMX Channel

	4. Auto strobe : strobe effect Press Enter to adjust the speed (1-99)	4. Sound mode 4 : Press Enter to adjust the sensitivity (1-100)	2. Static color : 32 kinds of static color	4. Display backlight : LCD screen brightness 0-100%	Run time
	5. Wifi mode : App control			5. Lcd close time : Lcd screen ON / OFF 1、 Open 2、 5S 3、 10S 4、 15S 5、 30S	Use Time
				6. Fan speed : 1.Auto speed 2.Slow speed 3.Middle speed 4.Fast speed	Temperature
				7. Reset : Press 8888	
				8. Manual white balance : Press 6666	
				9. Temperature : Show state of temperature ON / OFF	
				10. Battery : Show battery state of charge ON / OFF	
				11. Back ground color : choose LCD back ground color	

DMX Channel

Channel	6 Channel Mode	10 Channel Mode
CH1	Red: 0 - 255	Dimmer: 0 - 255
CH2	Green: 0 - 255	Red: 0 - 255
CH3	Blue: 0 - 255	Green: 0 - 255
CH4	White: 0 - 255	Blue: 0 - 255
CH5	Amber: 0 - 255	White: 0 - 255
CH6	UV: 0 - 255	Amber: 0 - 255
CH7		UV: 0 - 255
CH8		Strobe: 0 - 255
CH9		Dimmer off: 0 - 8 Color mix: 9 - 50 Color jump change: 51 - 100 Color Suddenly change: 101 - 150 Color gradual change: 151 - 200 Sound mode 1: 201 - 220 Sound mode 2: 221 - 240 Sound mode 3: 241 - 255
CH10		Select color and speed (use with CH 9)

Mark:

1. Press the WiFi Mode in the MENU of SHOW, if you find "NO WIFI", then this version of light is not available for Mobile APP control. If you find "LED-XXX" below the WiFi logo, then this version of light can be controlled by APP, XXX stand for the ID address.
2. Press HELP, you can scan the microcode to download the APP.
3. WiFi control step:
 - 1) Install the APP into the mobile phone (APP name: LED LAMP)
 - 2) Change into the WIFI mode (Press SHOW and choose the fifth option.
 - 3) Turn on the mobile wifi and search the "LED-XXX", click to link it.
 - 4) Turn on the APP to control the light.
4. In the mode of A001 console mode, Press MENU for long can change the refresh frequency (1200KHZ/4000KHZ/12KHZ/20KHZ)
5. In the mode of A001 console mode, Press ENTER for long can decrease the data of color mix for brightness (0-20)

6. This fixture is with RDM function, and auto temperature protect (When the temperature over 75 degree, the power consumption will low down to 30%, when the temperature over 95 degree, the light will be shut down)
7. When the light is in charge, the display will turn into charging interface, if you need to use the light in charging, please press MENU.

Wireless Remote Control:



1. ON: Turn on
2. OFF: Turn off
3. Fash: Strobe
4. Soun: Sound mode
5. Auto: Auto run mode
6. Cust: Customized color
7. Colo: Change color
8. Fade: Color fade change
9. Low: Change to low speed
10. Med: Change to middle speed
11. High: Change to high speed
12. Red: Red color
13. Gren: Green color
14. Blue: Blue color
15. Aber: Amber color
16. Whit: White color
17. UV: UV color


WiFi Control:

1) iOS mode:


1. Scan this code or search “LED LAMP” on App Store, download the app on mobile phone.



2. Press “+” on the right top of the APP, then find and choose the “LED WiFi”

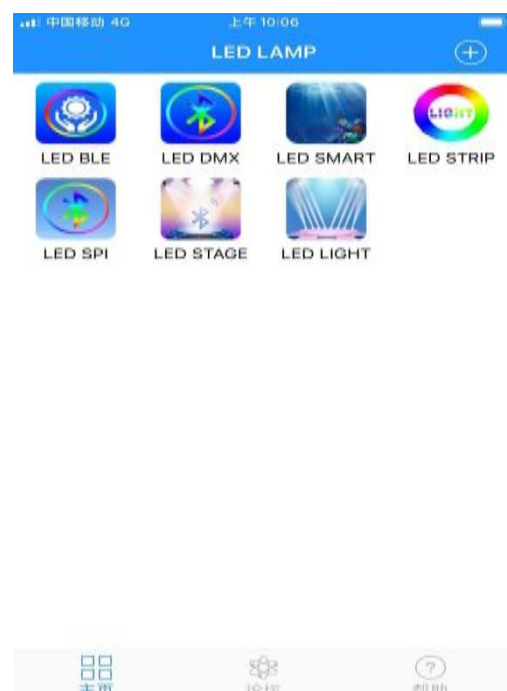

3. After add the “LED WiFi”, you can start to control the light by the mobile phone.

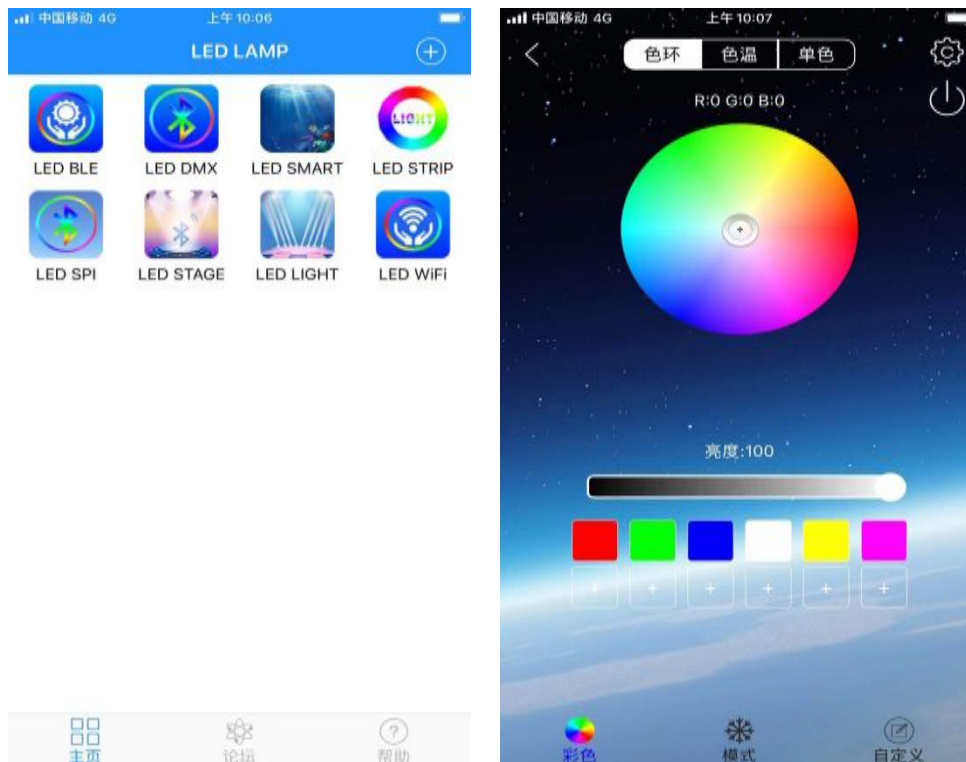

2) Android mode:

Please click this file and download it to your phone:



LED WIFI20191028.apk



Company: Guangzhou Sailwin Light&Audio Technology CO.,LTD

Add: NO211, Building 3, Seiko Creative Park, Wangang Road, Xinhua Street, Huadu District,
Guangzhou, china

Email: info@sailwinlight.com

Tel: 0086-20-61839740

Phone: 0086-15013209611